

Silent Install Manual

Index:

1. Silent Install with Default settings	2
1.1. Silent Install	2
2. Silent Install with change settings	3
2.1. Change settings of OPOS Driver's installer	3
2.2. Change settings of OPOS Control's installer	5
3. Table of error codes	8

First Edition :


January 15, 2010

1. Silent Install with Default settings

This is the installation using default setting file (DRVSTB20Setup.ini / OPOSSTB20Setup.ini). In this case, all of the components will be installed.

1.1. Silent Install

1.1.1. Start Silent Install

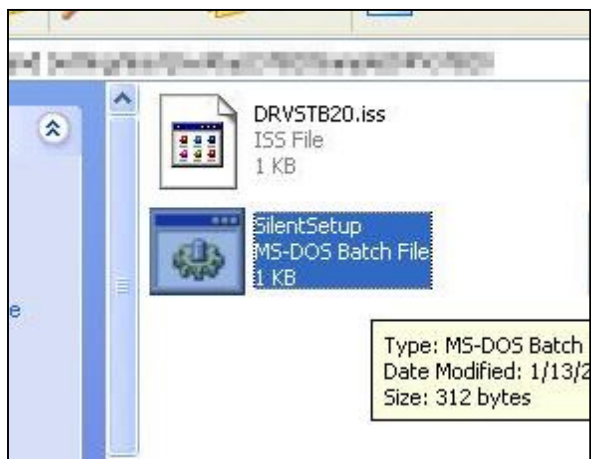


Run the “SilentSetup.bat” in the Kit.

2. Silent Install with change settings

This is the installation using customized setting file (DRVSTB20Setup.ini / OPOSSTB20Setup.ini). In this case, you need to edit the setting file.

2.1. Change settings of OPOS Driver's installer

2.1.1. Open the setting file

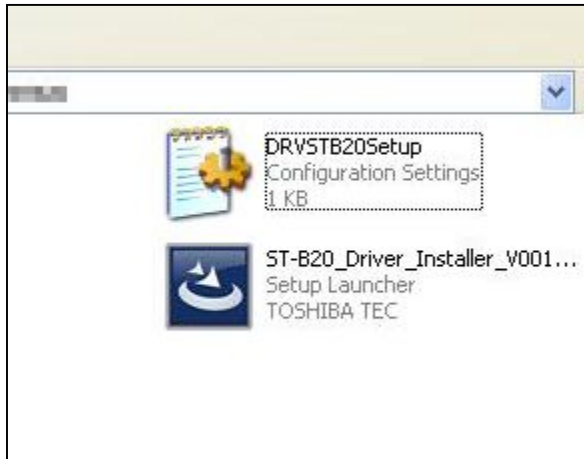

Open the file (DRVSTB20Setup.ini) with text editor.

2.1.2. Selection of install destination

```
[InstallDirectory]
Path=C:\OPOS\TEC\
```

Input install target directory to “[InstallDirectory] →Path”

2.1.4. Selection of components

```
[InstallDrivers]
PS2POSKeybaord=1
CashDrawer=1
SevenSeg=1
Sensor=1
WatchdogTimer=1
```

Select components you want to install

- 1: install
- 0: do not install

2.1.5. Selection of reboot

[Reboot] RebootMachine=1


Input the value to “[Reboot] →RebootMachine” from the following.

- 1: reboot the computer
- 0: do not reboot the computer

2.1.6. Save

Save settings and close file.


2.1.7. Silent Install

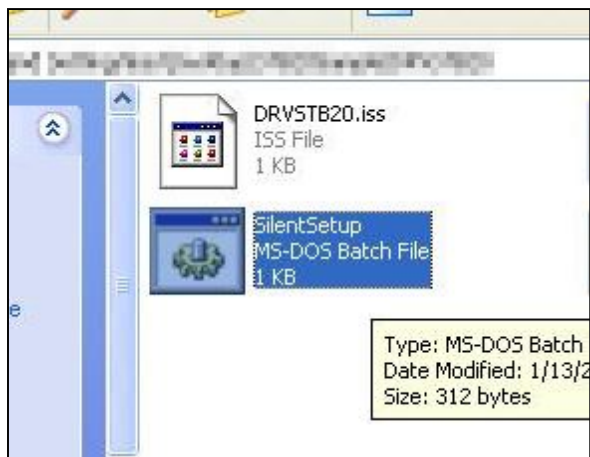

Run the “SilentSetup.bat”.

2.2. Change settings of OPOS Control's installer

2.1.1. Open the setting file

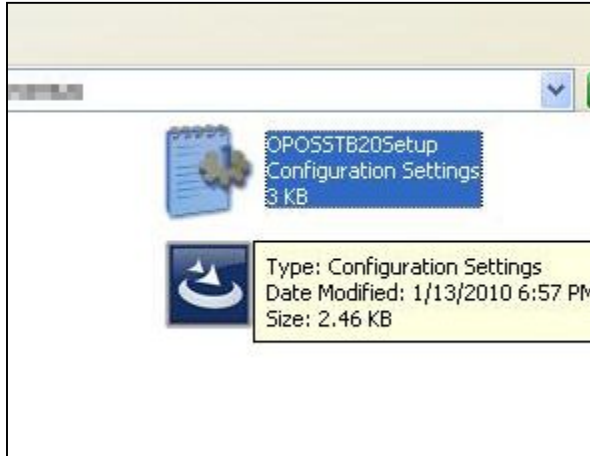

Open the file (OPOSSTB20Setup.ini) with text editor.

2.1.2. Selection of install type

```
[SetupType]  
Type=303
```

Input install type from the following values.

- 301 : Execute
- 302 : Development
- 303 : Execute and Development

2.1.3. Selection of install destination

```
[InstallDirectory]  
Path=C:\¥OPOS¥TEC¥
```

Input install target directory to “[InstallDirectory] →Path”

2.1.4. Setting for Develop Environment

This setting is valid when you select “Development” at “2.1.2. Selection of install type”.

```
[Develop Environment]
Keylock=1
MSR=1
Scanner=1
LIU=1
Drawer=1
Printer=1
```

Select components you want to install

```
1:      install
0:      do not install
```

2.1.5. Setting for Develop Environment

This setting is valid when you select “Development” or “Execute and Development” at “2.1.2. Selection of install type”.

```
[Execute Environment]
;-----Keylock-----
;      EKEY:  iButton
;      PKBST: Keylock of PKBST POSKeyboard
EKEY=1
PKBST=1

;-----MSR-----
;      ST55MSR: MSR of PKBST POSKeyboard
;      MSRSO:  MSR of TFTST76
;      MCR RMS:   MSR of TFTST-A20/TFTST-B20
ST55MSR=1
MSRSO=1
MCR RMS=1
```

Select components you want to install

```
1:      install
0:      do not install
```

2.1.6. Save

Save settings and close file.

2.1.7. Silent Install



Run the “SilentSetup.bat”.

3. Table of error codes

After installation, installer creates a log file (“setup.log”). Refer to [ResponseResult] → ResultCode to confirm the result of installation.

[ResponseResult] ResultCode=0

This is a table of error codes.

Value	Mean
0	Success
-1	General error
-2	Mode is invalid
-3	Cannot find the necessary data. There are any errors in the response file.
-4	Insufficiency of Memory
-5	Cannot find the response file
-6	Cannot write to the response file
-7	Cannot write to the log file
-8	The path of response file is invalid
-9	Data format is invalid
-10	Data format is invalid
-11	Unknown error occurred
-12	Dialog order is wrong
-51	Cannot create the specific folder
-52	Cannot access the specific file or the specific folder
-53	Selected option is invalid